


Wall mounted receptacle,fused and switched with mechanical DUO-interlock

Part no. 5946AE



- screw terminals
- circuit breaker C-characteristics
- switched
- mechanical DUO-interlock
- switch can be padlocked
- highly heat resistant contact carrier
- nickel plated contacts

Technical information	
Ampere	32A
Poles	4p
Voltage	380-440 V
Earth position	3 h
Hertz	50-60 Hz
Connection technology	Screw terminals
Contact	nickel plated contacts, highly heat resistant contact carrier
Protection type	IP67

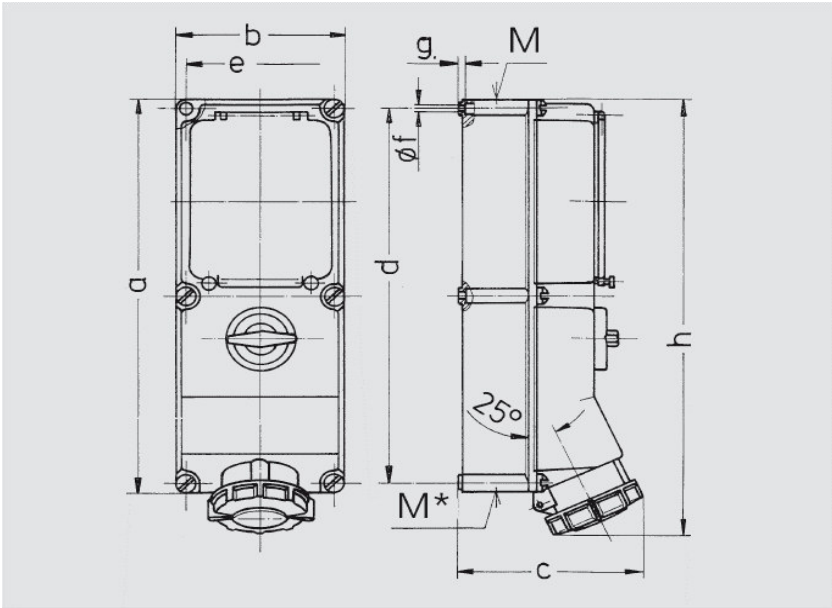

Drawing		16			32		63	
1 MB 181	Amp.	3	4	5	4	5	4	5
Dim. in mm	Poles							
a		364	364	364	364	364	460	460
b		134	134	134	134	134	180	180
c		160	162	163	168	168	209	209
d		347	347	347	347	347	440	440
e		117	117	117	117	117	160	160
f		6,3	6,3	6,3	6,3	6,3	8,1	8,1
g		8	8	8	8	8	8	8
h		391	395	398	408	411	525	525
M		32/40	32/40	32/40	32/40	32/40	40	40
M*		2x32	2x32	2x32	2x32	2x32	2x40	2x40
Max. cable diam. (mm)		27	27	27	27	27	27	27
Terminal for cond. cross		1,5	1,5	1,5	2,5	2,5	6	6
section (mm²) min.-max.		—4	—4	—4	—10	—10	—25	—25


Base mural - N° de Ref. 5792A



- Contacto roscado
- Portacontactos altamente resistente al calor
- Contactos niquelados
- Desconectable
- Bloqueo mecánico DUO
- Se cierra con candado

Información sobre el técnica

Amperios	32 A
Polos	4p
Voltios	380-440V
Sentido horario	3 h
Hertzios	50-60 Hz
Técnica de conexión	bornas de tornillo
Contactos	contactos niquelados, portacontactos altamente resistente al calor
Grado de protección	IP 67

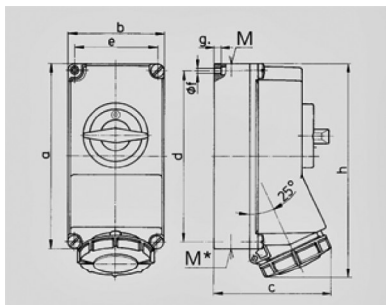

Plano		16			32		
1 MB 207	Amp.	3	4	5	3	4	5
Polos							
Dim. en mm							
a	225	225	225	225	225	225	225
b	118	118	118	118	118	118	118
c	144	146	147	152	152	153	153
d	208	208	208	208	208	208	208
e	101	101	101	101	101	101	101
f	6,3	6,3	6,3	6,3	6,3	6,3	6,3
g	8	8	8	8	8	8	8
h	252	255	259	268	268	274	274
M	1x25 y 1x32			1x25 y 1x32			
M*	2x25	2x25	2x25	2x25	2x25	2x25	
Ø y [max]	25	25	25	25	25	25	
Borne para cond. Sección	1,5	1,5	1,5	2,5	2,5	2,5	
Transvers. (mm²) min.-max.	—4	—4	—4	—10	—10	—10	